

DIRECT PUSH DRB 60

LINER SAMPLING FOR UNDISTURBED SOIL SAMPLES



Follow us on Instagram:
[nordmeyer_geotool](https://www.instagram.com/nordmeyer_geotool)



- Working with the mast-guided hydraulic hammer for fast drilling results with the DRB 60.
- The outer casing and the inner liner are drilled-in simultaneously. Only the liner is extracted. The outer casing remains in the ground and protects the drilled hole.



- Working with the SPT-drop weight unit to achieve desired depth, even in densely packed soil layers.





- Usual procedure for rod extraction with extraction jack and wheel clamp.
- The outer tube is completely extracted at the end of the drill-works.



- Clean liner samples caught in a PVC liner 40 mm in diameter.
- The DRB 60 meets the highest quality grade.

POS.	DESCRIPTION	ARTICLE
01	DRB 60 PLUG-IN TOOL	312167
02	DRB 60 IMPACT TUBE	312029
03	DRB 60 FORK PLATE	312038
04	DRB 60 BRASS PIECE	312166
05	ANVIL BRASS PIECE 36/44 LONG (SHORT)	336117
06	DRB 60 BRASS TUBE	312172
07	HOLLOW ROD	580126
08	VIBRATING METAL BUFFER	E900947
09	DRB 60 ADAPTER	312034
10	DRB 60 CUTTING SHOE	312030
11	DRB 60 PILOT TUBE	312027
12	DRB 60 PE-CAPS	312183
13	DRB 60 PVC-LINER	312178
14	DRB 60 O-RING FOR ROD POINT	312040
15	DRB 60 ROD TIP	312039
16	DRB 60 DISTANCE RING	312035
17	DRB 60 CORE CATCHER	312032
18	DRB 60 LINER ADAPTER	312043
19	DRB 60 BALL	312045
20	DRB 60 O-RING FOR LINER ADAPTER	312046
21	SET SCREW M6X6	312564

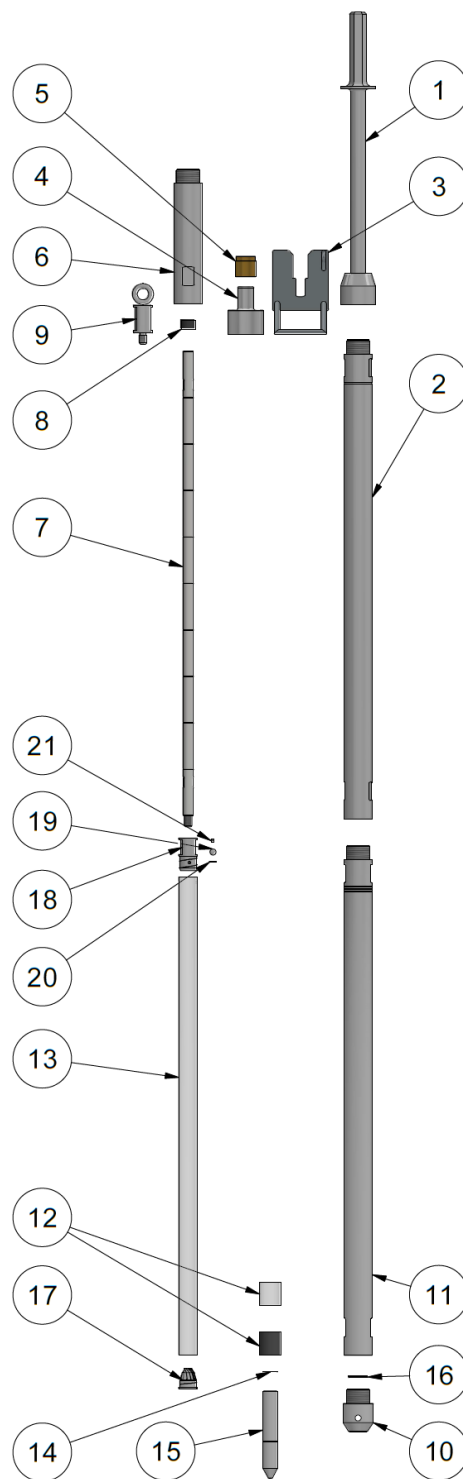

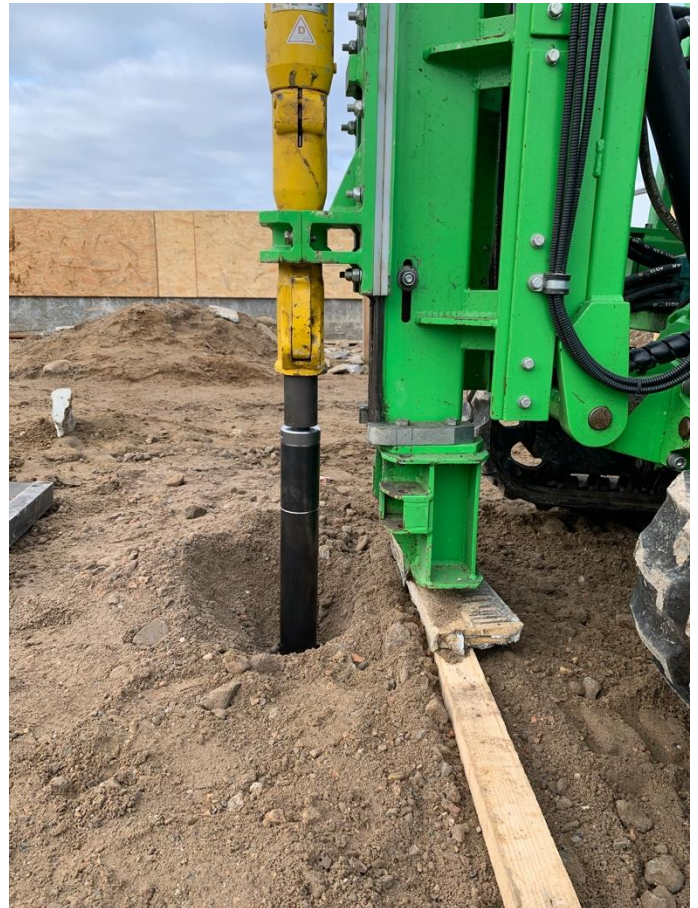

Nordmeyer GEOTOOL GmbH
Weststraße 6
16356 Werneuchen (next to Berlin)

Tel: +49 (0) 33398 9142-0
Email: info@nordmeyer-geotool.de